

Custom folded 1.2mm aluminium flashing powder coated to match cladding and chased in to 15x6mm saw cut and sealed with flexible joint sealant (By others)

NC247T + NC248
Termination flashing base and cap.

NC 204
10g x 16mm csk Tek screw @ 600 centers through anti-crush packer (by others)

NC 220
15x15mm closed-cell foam insert

Concrete masonry block wall


Cut / ripped board

NC204
10g ss csk screws with 30mm min embedment

NC203E
fixing clip @ 600 centers

Direction of installation ↑

Crushed

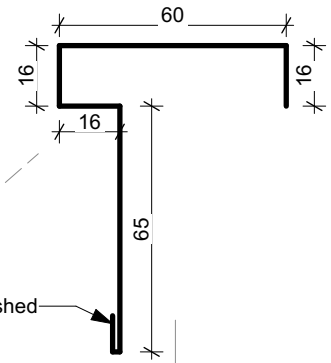

General note:

- Cladding fixings omitted for clarity
- When finishing a wall with a ripped board, the board must be direct fixed with a counter sunk screw @ 600mm centres



Nu-Wall cladding vertical direct fix
Typical Nu-Wall to concrete masonry external corner

NW-VDF-032.03

Drawn by: Nu-Wall Date: 19/9/2024

Checked by: RL, GT Scale: 1:2 @ A4

© 2021 copyright in this document is the property of Nu-Wall Aluminium Cladding Limited. All rights reserved. Nu-Wall is a registered trademark of Aluminium Product Brands NZ Limited